SURVEY FOR: METRO-PRAIRIE CONST.

LOT 17 & 18, BLOCK 1 = 882.86 C.I.F. DATUM
BENCHMARK: TOP NUT HYDRANT

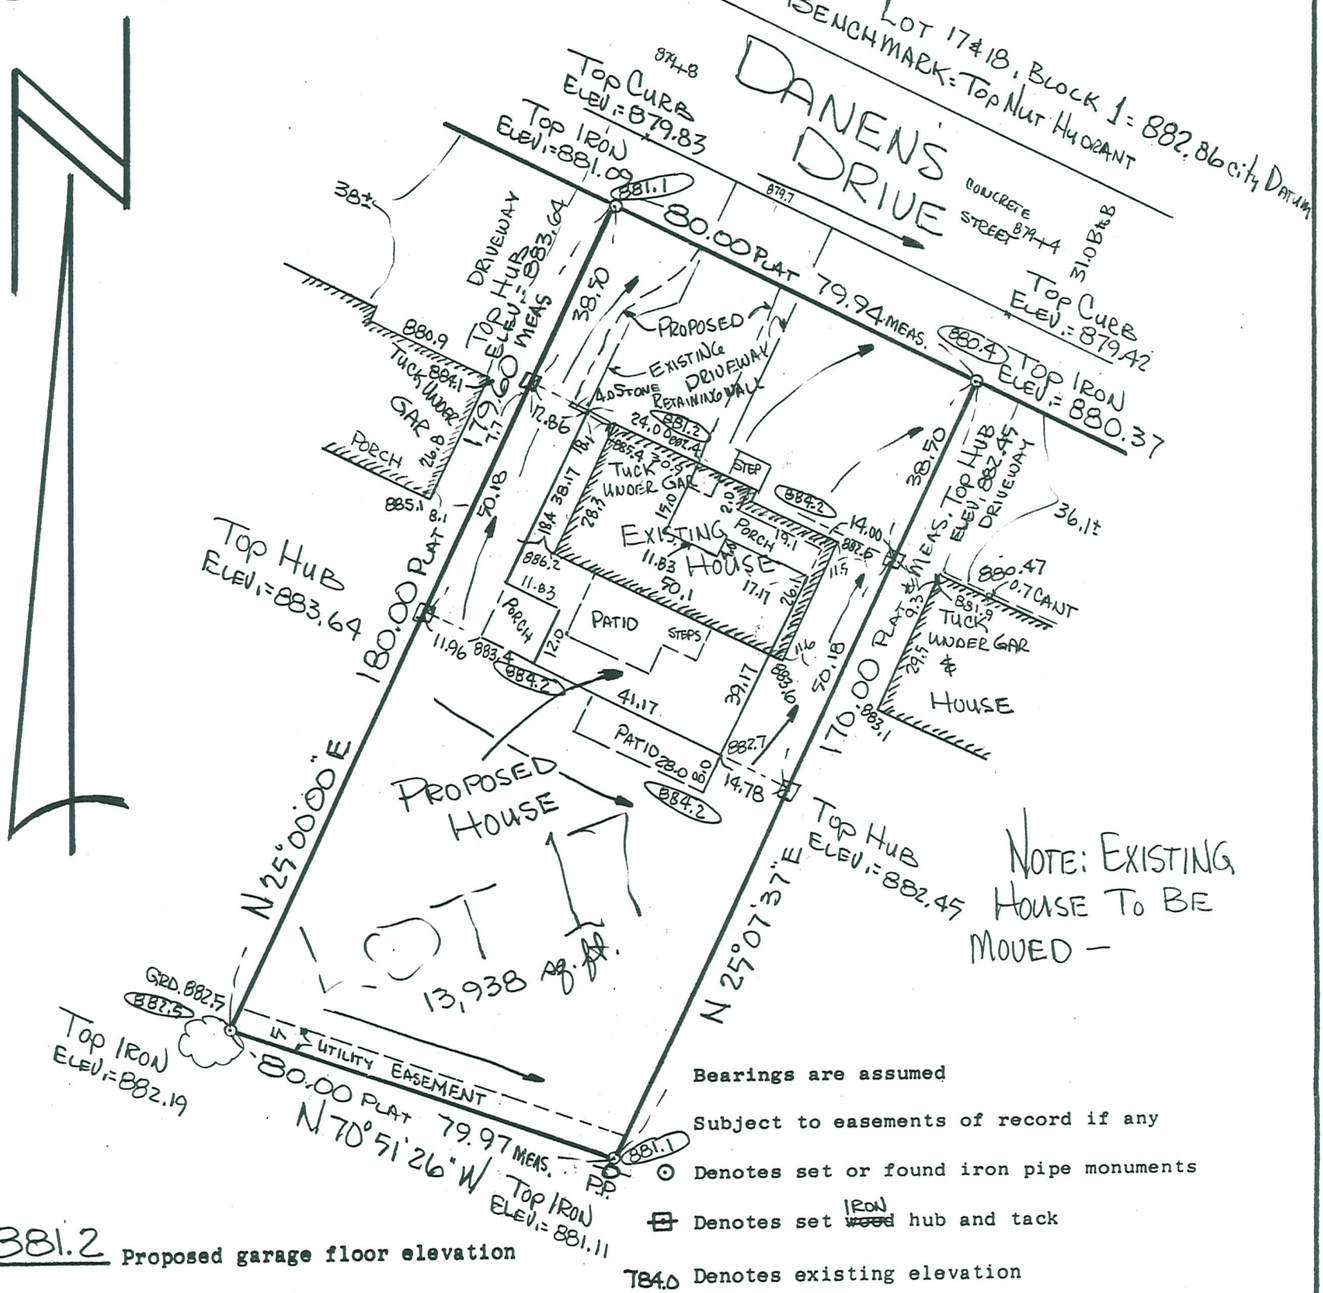

881.2 Proposed garage floor elevation

884.9 Proposed top of ~~block~~ POURED WALL elevation

876.2 Proposed lowest floor elevation

Bearings are assumed

Subject to easements of record if any

⊙ Denotes set or found iron pipe monuments

⊟ Denotes set ~~wood~~ IRON hub and tack

784.0 Denotes existing elevation

(784.0) Denotes proposed finish grade elevation

Denotes direction of surface drainage

Scale ~ 1 inch = 30 feet

I hereby certify that this is a true and correct representation of a survey of the boundaries of Lot 17, Block 4, BROOKVIEW HEIGHTS 1ST. ADDITION, HENNEPIN County. Minnesota as on file and of record in the Office of the County Recorder in and for said County, also showing the proposed location of a house as staked thereon.

That I am a duly Registered Land Surveyor under the Laws of the State of Minnesota.

Dated: JANUARY 12, 1999
REVISED. JANUARY 13, 1999

Allan R. Hastings

Allan R. Hastings
Minnesota Registration No. 17009
212 East First Avenue
Suite No. C
Shakopee, Minnesota 55379
Phone 612 445 4027

5145 DANENS DR