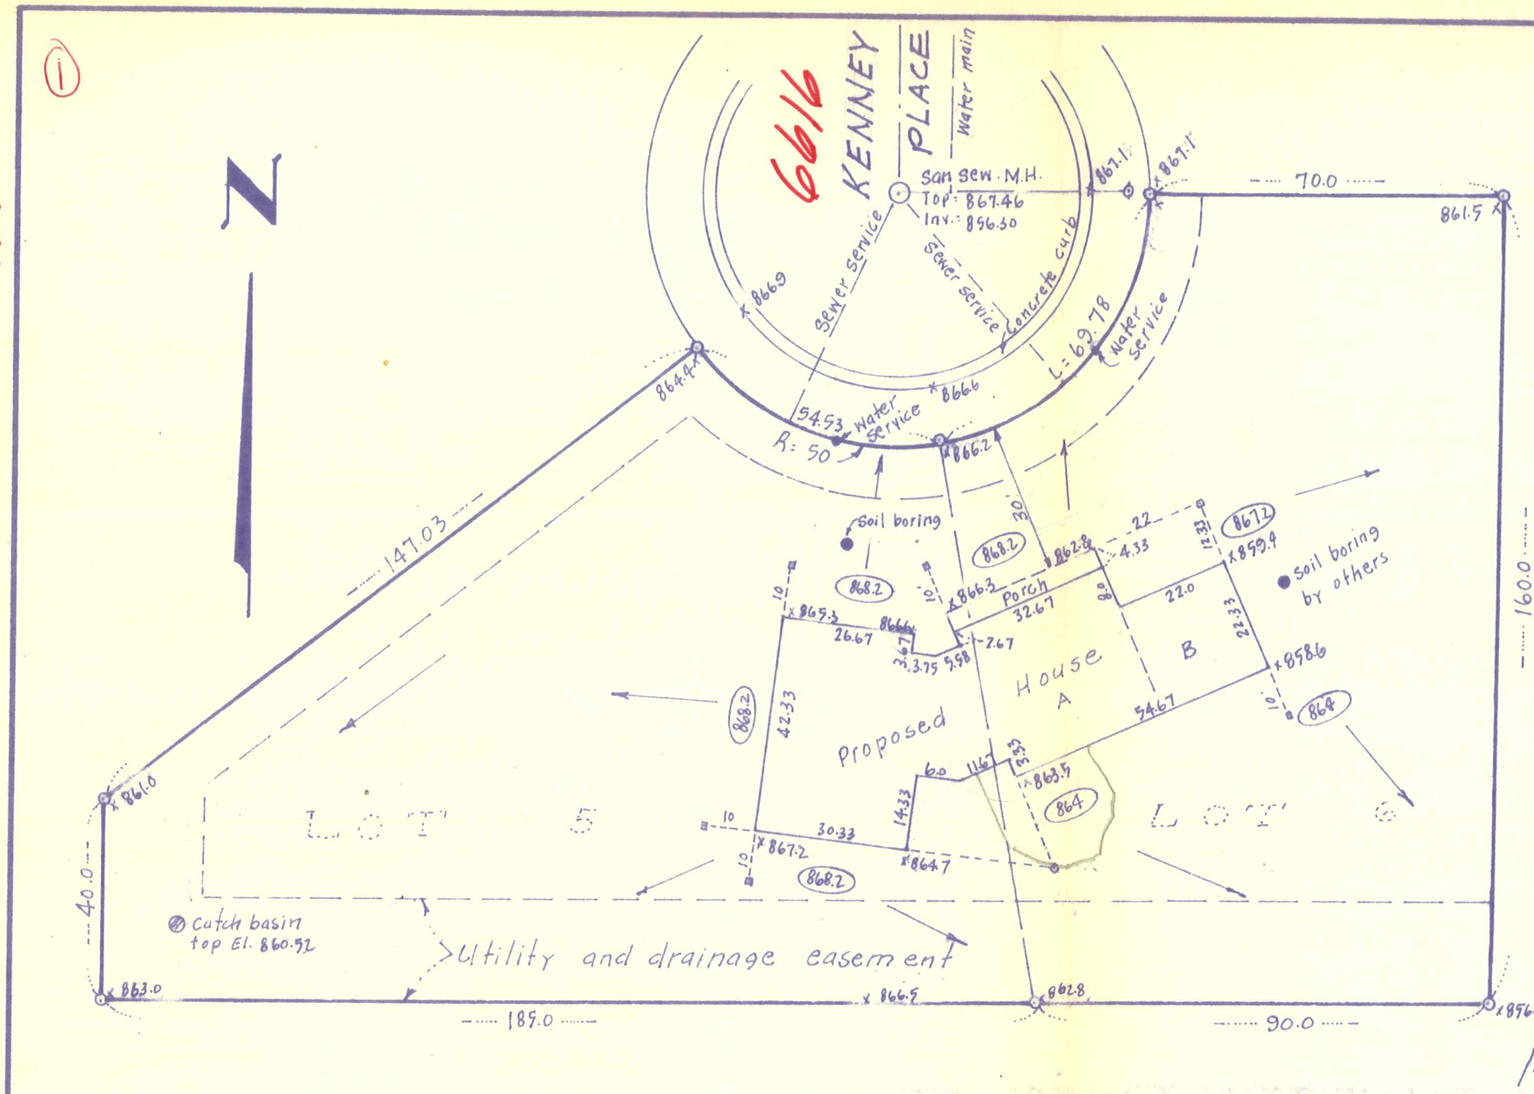

GENERAL NOTES:

1. ○ Denotes iron monument
2. 867.46 Denotes existing elevation
3. ▫ Denotes offset stakes
4. ⬭ Denotes proposed ground elevation
5. → Denotes proposed drainage
6. Proposed Garage Floor elev. = 868.6
7. Proposed top of foundation elev.
   a) 869.0
   b) 867.92

APPROVED
Date
By
City of Edina Bldg. Dept.

I-563

I hereby certify that this is a true and correct representation of a survey of the boundaries of:

Lots 5 and 6, Block 1, Kenney Addition

And of the location of all buildings thereon, and all visible encroachments, if any, from or on said land. As surveyed by me this 27th day of November, 1974.

Gary L. Gabriel
Land Surveyor, Minnesota Reg. No. 9066

DRAWN
DESIGNED
DATE

I HEREBY CERTIFY THAT THIS SURVEY, PLAN OR REPORT WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY REGISTERED LAND SURVEYOR UNDER THE LAWS OF THE STATE OF MINNESOTA.

DATE _____ REG NO _____

GABRIEL LAND SURVEYING
3030 HARBOR LANE NO, MPLS MN 55441
TEL 545-0908

SURVEY FOR:
GERRY CONSTRUCTION

04-116-21-32-0088
6616 Kenney Pl.

SCALE 1" = 30'
BOOK 3
PAGE
FILE NO.